

#177
 $\frac{3}{4}$ " Random Stone

Texture Specification:



Nominal Relief: $\frac{3}{4}$ "

Stone Width: $\frac{1}{2}$ "-1"

Joint:
 Random Joints



Abutting edges of this particular formliner type will not match in seamlessly due to the to the random nature of these specific patterns.

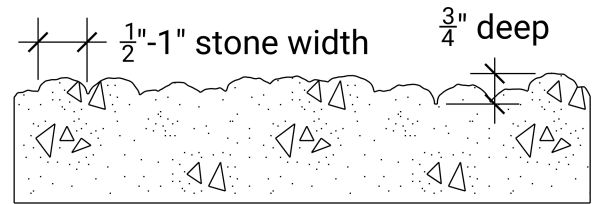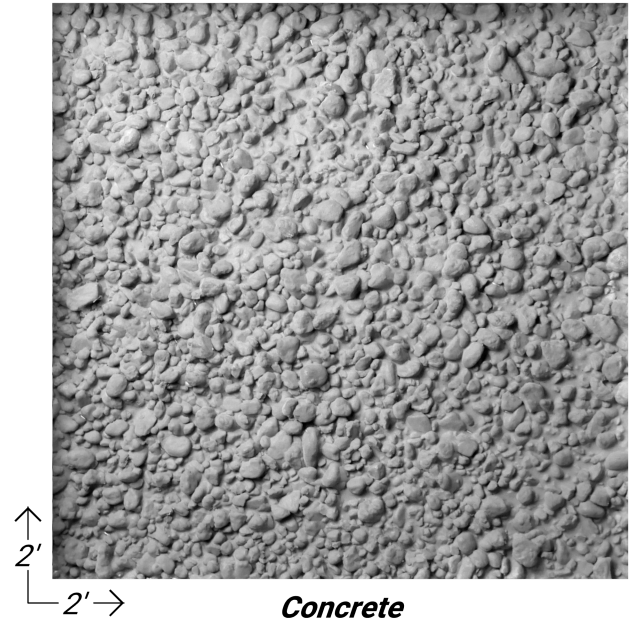

SHORT FORM SPECIFICATION

FABRICATION AND INSTALLATION:

- No substitutions will be allowed without prior written approval from the architect or engineer.
- High reuse formliners to be manufactured from urethane rubber.
- Urethane formliners can be bonded to plywood upon request.
- Urethane formliners without plywood should be completely bonded to forming surface using methods recommended by Scott System. Please refer to the application guidelines.
- Urethane formliners can be customized in size, reinforcement, joint orientation, etc. Please contact Scott System for additional information.
- Casting a concrete mockup is recommended to simulate job conditions and review texture in concrete.
- Samples can be provided upon request.

CARE AND HANDLING:

- Do not expose urethane formliner to temperatures exceeding 140°F (60°C).
- Release agents shall be approved and applied as per Scott System recommendation.
- Keep formliners away from contaminants such as gasoline, acids, solvents, etc.
- Keep formliners out of prolonged direct exposure to sunlight.
- For further instructions please refer to the application guidelines.

Scott System
109 General Fellows Road
Greenwich, NY 12834
518.383.0500